CRT ADAPTER

BK PRECISION®

MODEL CR-14

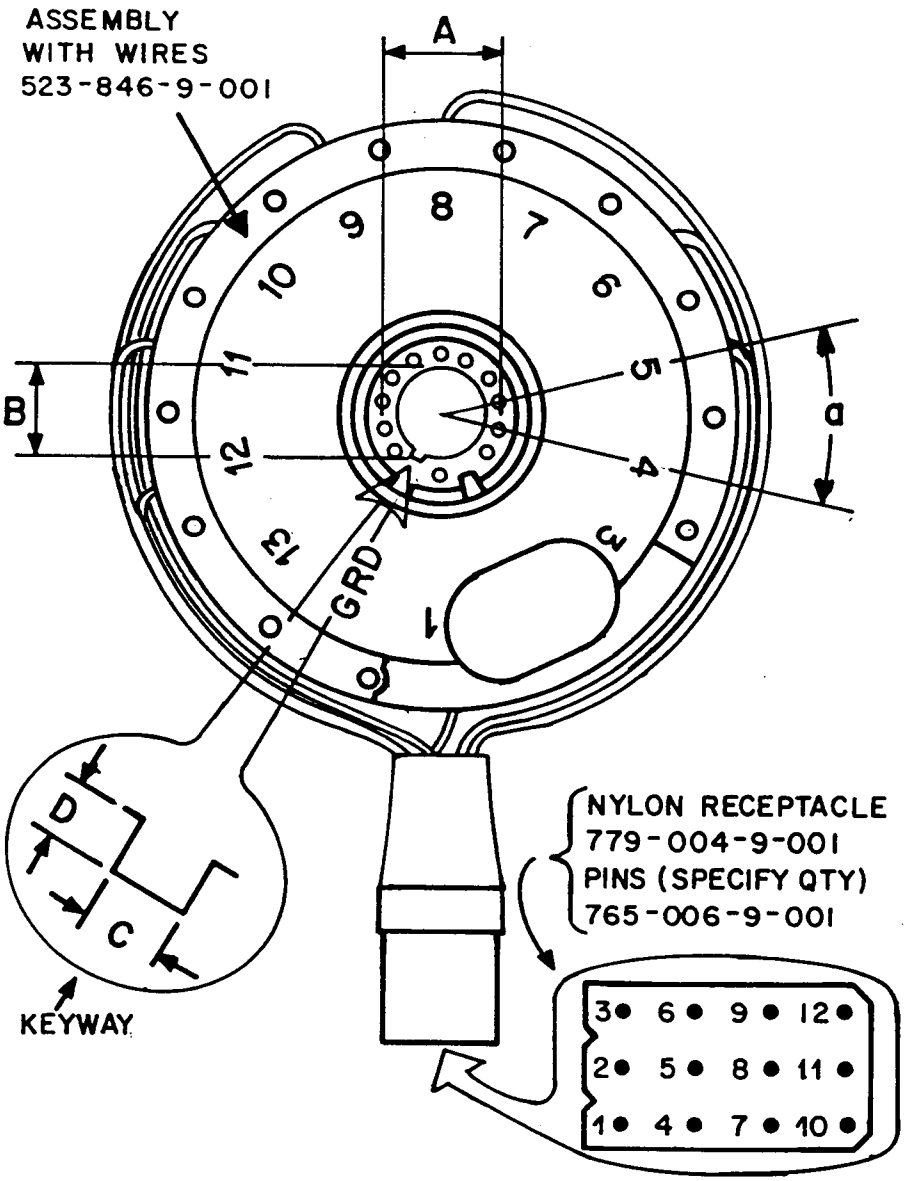

WIRING SCHEME		
CRT SOCKET PIN	WIRE COLOR	NYLON RECEP-TACLE
1	WHT	12
2	---	---
3	YEL/BLU	8
4	BLU	5
5	WHT/BLU	11
6	BLK	1
7	BRN	2
8	YEL/RED	6
9	RED	3
10	WHT/RED	9
11	WHT/GRN	10
12	YEL/GRN	7
13	GRN	4
14	keyway	---

FITS CRT DIMENSIONS:

A = pin circle diameter	= 15.24 mm/0.600" nom.
a = angular pin spacing	= 25-5/7°
B = post diameter	= 11.4 mm/0.449" max.
C = keyway width	= 2.00 mm/0.079" max.
D = keyway depth	= 1.70 mm/0.067" max.

BK PRECISION®

B & K-Precision, Factory Service Department
Maxtec International Corporation
6470 West Cortland Street
Chicago, Illinois 60635
Telephone: (312) 889-1448

481-167-9-014D

Used with B & K-Precision Models: 467, 470, 480, 490

TUBE TYPE	HEATER VOLTAGE	TUBE TYPE	HEATER VOLTAGE
13VATP22	6.3	470CZB22	6.3
19VADP22	6.3	470GNB22	6.3
19VDB22	6.3	470KGB22	6.3
200HB22	12.6	480AB22	6.3
200KB22	12.6	510BLB22	6.3
200LB22	6.3	510EWB22	6.3
220HB22	12.0	510EYB22	6.3
250XB22	12.0	510FAB22	6.3
290FB22	6.3	510GCB22	6.3
290HB22	6.3	510HGB22	6.3
320AXB22	6.3	510KTB22	6.3
320BJB22	6.3	510UGB22	6.3
370AMB22	6.3	560ACB22	6.3
370CUB22	6.3	560ZB22	6.3
370ERB22	6.3	670ALB22	6.3
400DAB22	6.3	670AZB22	6.3
420AFB22	6.3	A37-550X	6.3
420BTB22	6.3	A42-554X	6.3
420XB22	6.3	A56-613X	6.3

Due to the number of CRTs that this adapter will fit, this is only a partial listing. For a complete listing, use the chart mailing service referred to below.

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the B & K-Precision chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRT's that have come out since the last mailing.

If you wish to take advantage of this service, contact:

B & K-PRECISION, FACTORY SERVICE OPERATIONS
MAXTEC INTERNATIONAL CORPORATION
6470 West Cortland Street
Chicago, Illinois 60635
Telephone #: (312) 889-1448

For information on ordering a subscription.

BK PRECISION®

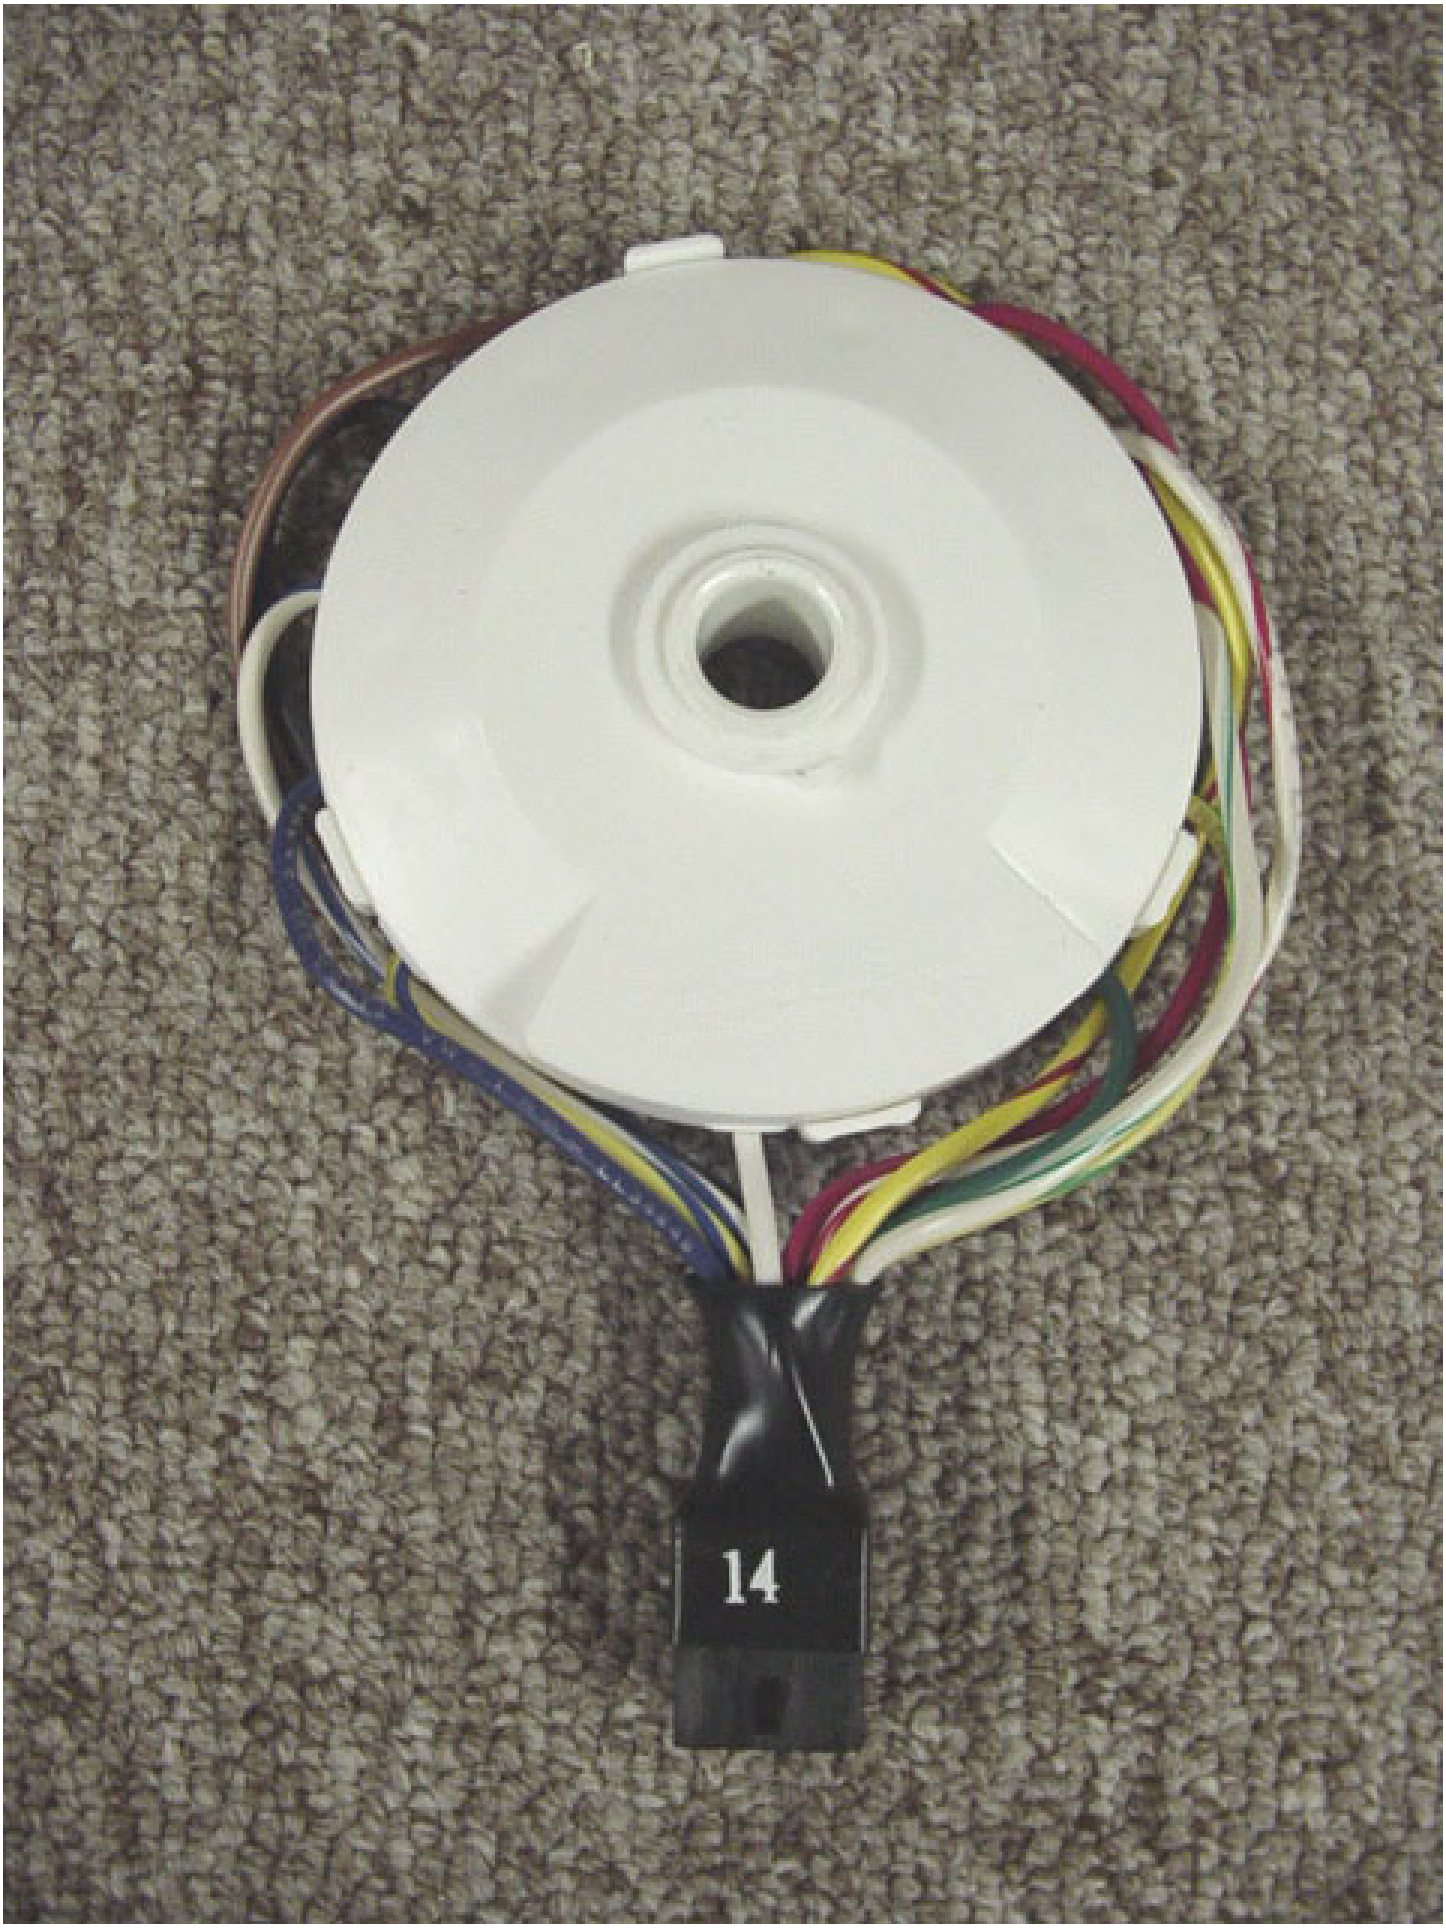
14